

1 taken, it
ifference"
void over-
f.m. over

, the f.m.
quired for
a spacing
unwanted
of about 3
ed. This
s broadly
of an f.m.
the inter-
le and the
i. detector
hich, with
oportional
e between

visibility
is that the
unwanted
ith an a.m.
a uniform
ith an f.m.
ido-random

"just not
ermined for
i could be
nonochrome
converter.

nonochrome
g frequency
n unwanted
s-modulated

comparison
on systems.
No. T-166,

an V.H.F./
Stockholm
ommunication

RESEARCH DEPARTMENT

KIDDERMINSTER U. H. F. RELAY STATION : SUMMARY OF INSTALLATION

Technological Report No. RA-3/9
UDC 621.396.712. 1967/35

G.H. Millard, B.Sc., A.Inst.P.

D. Maurice
for Head of Research Department

This Report is the property of the British Broadcasting Corporation and may not be reproduced in any form without the written permission of the Corporation.

This Report uses SI units in accordance with B.S. document PD 5686.

U.H.F. RELAY STATIONS : SUMMARY OF INSTALLATION

NAME: 102.2 KIDDERMINSTER

TYPE: 2

TRANSMISSIONS COMMENCED: 22.5.67 (TRADE) 5.6.67 (SERVICE)

SITE DATA

LOCATION: Burlish Camp

GRID REFERENCE: SO 808739

HEIGHT, a.o.d. : 84 m (276 ft)

SUPPORT MAST

TYPE: 46 m (150 ft) tower

OVERALL HEIGHT: 56 m (185 ft)

FREQUENCIES

BAND: V

CHANNELS: 54, 58 (BBC-1)

61, 64 (BBC-2)

RECEPTION

PARENT: Sutton Coldfield

CHANNELS: 40 (BBC-2), 43

46 (BBC-1), 50

POLARIZATION: Horizontal

AERIALS: 2 x 4λ Troughs

AERIAL HEIGHTS: 23 m (75 ft) a.g.l.

26 m (85 ft) a.g.l.

TRANSMITTERS

TYPE: (1) S.T.C. TWT 50W
(2) TWT 200W

OPERATING POWER: (1) 0.039 kW
(2) 0.155 kW

FEEDERS

TRANSMITTING: 47 m (155 ft) HF 15/8
+ 3 m (10 ft) UR 67

RECEIVING: BICC T 3319

TRANSMITTING AERIAL

TYPE: Standard cardioid

RADIATION CHARACTERISTICS

POLARIZATION: Vertical

MEAN E.R.P. : (1) 0.28 kW

(2) 1.12 kW

MAXIMUM E.R.P. : (1) 0.5 kW

(2) 2.0 kW

RADIATING LENGTH: 16λ


H.R.P. : Fig.1

V.R.P. : Fig.2

MEAN HEIGHT: 49 m (161 ft) a.g.l.

NOTES: (1) Initial operation


(2) Power increase when 200W TWT amplifier available

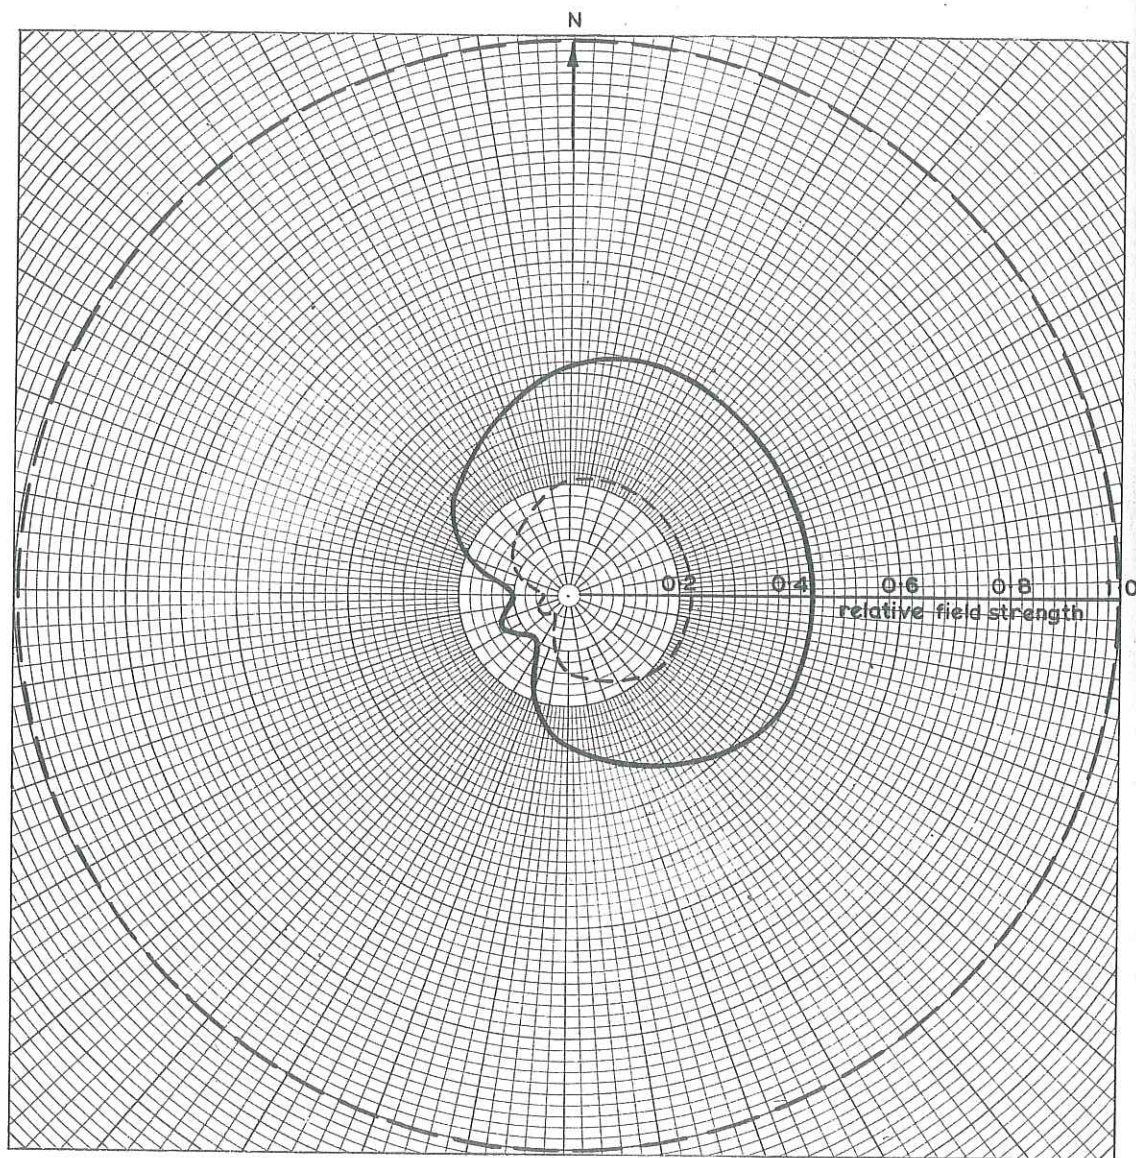

KIDDERMINSTER

Fig.1. Horizontal radiation pattern
VERTICAL POLARIZATION

- Transmitter power: 0.039 kW
Mean E.R.P.: 0.28 kW
 - Transmitter power: 0.155 kW
Mean E.R.P.: 1.12 kW
 - Stockholm E.R.P. limit
- Unit field corresponds to an E.R.P. of 10 kW

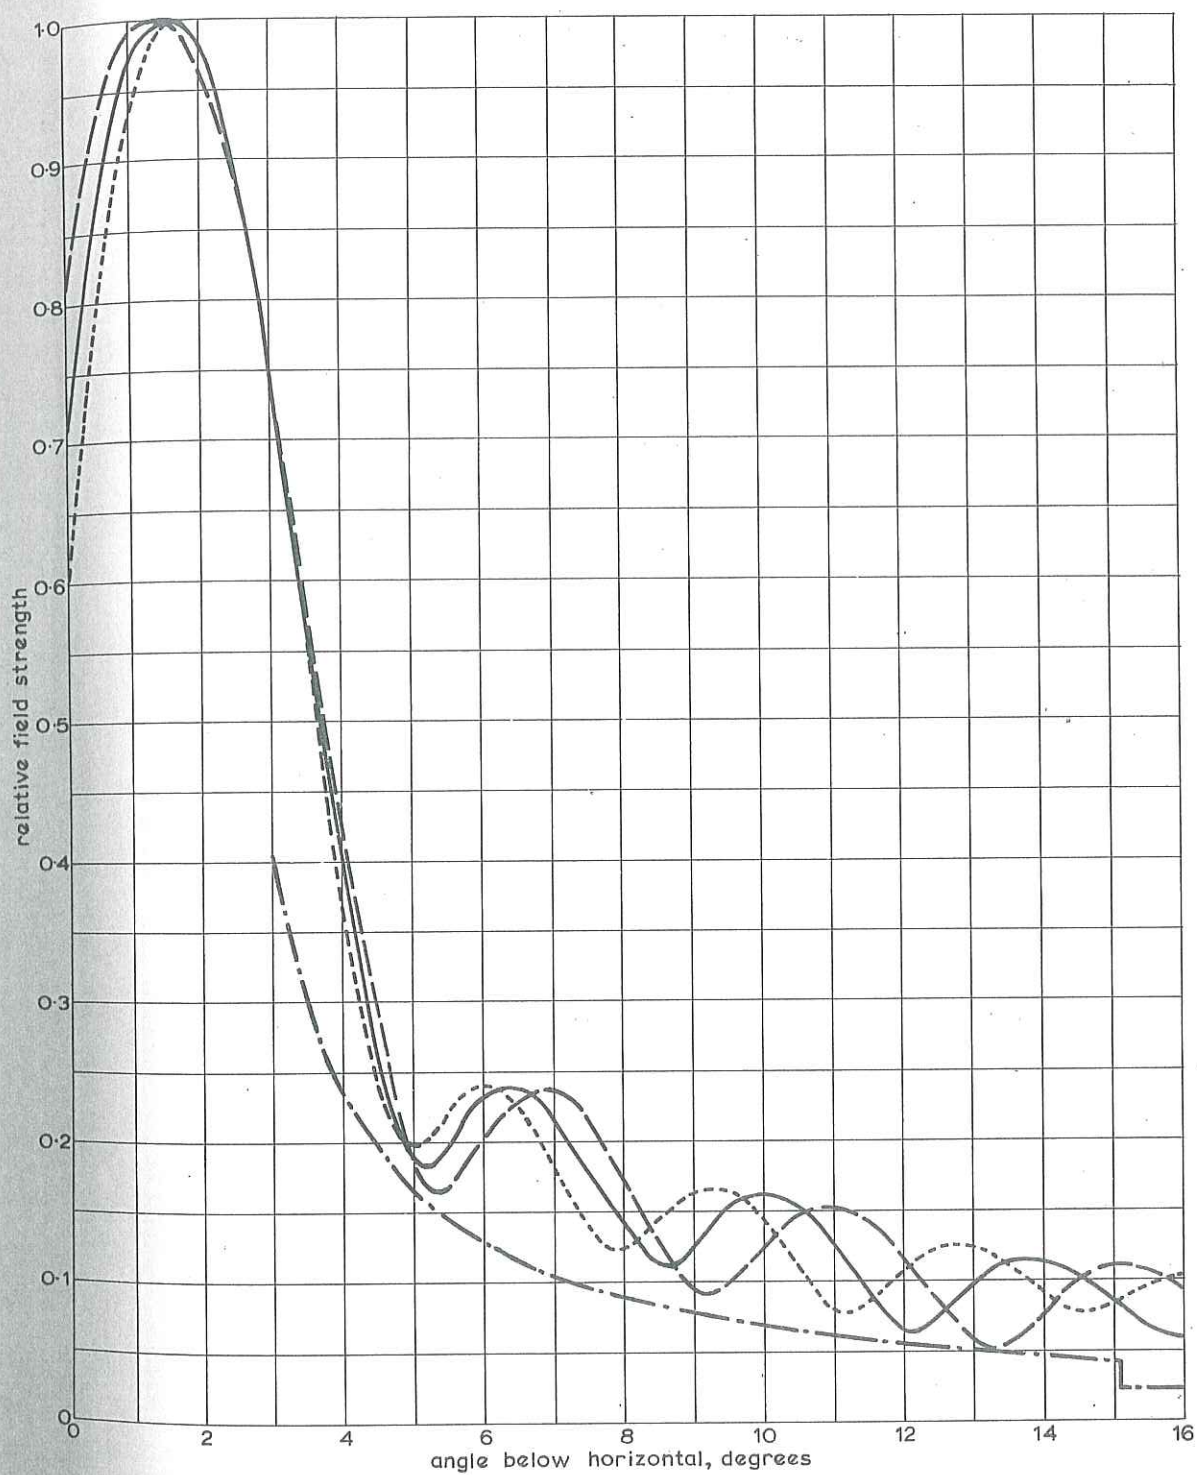

KIDDERMINSTER

Fig. 2. Vertical radiation pattern

- — — 710 MHz
- — — 790 MHz
- - - - - 870 MHz
- . - . - Specified minimum field

